



Weston Ranger 9 (Model 348) Zone System Label Installation Instructions

1. Center the red arrow on your dial on the "17" mark. This is where the "Zone V" mark on the label will be eventually placed. Use a piece of tape on the meter's rings to keep the dial from rotating while applying the label.

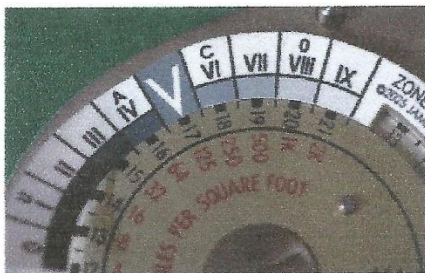

2. On the right side of the label there are some faint gray lines. The lines represent where the Exposure Value (EV) scale window is. If you want to use EVs then you will need to cut out that portion of the label. It is not necessary to use the EV scale to use the Zone System. I will show a label with the EV scale opening for the rest of the assembly instructions. There is a little black dot on the label that corresponds with the EV mark on the dial.

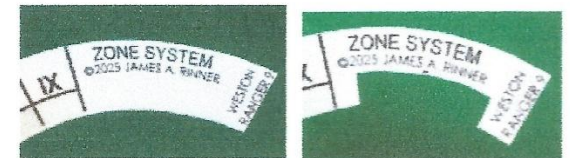

3. On the back of the label, the paper backing has a cut in it so you can remove the backing easily. Remove half of the backing and carefully place the unexposed, non-sticky, half of the label on the meter till the marks of the label match the marks of the meter dial. Remember, Zone V on the label is placed where the red mark is on the dial. (see above) I use the non-sticky half of the label to align the Zone marks. When aligned, I press the sticky side down.



4. Once that is done, remove the other half of the backing and press the remainder of the label onto the dial.
5. Here is a good resource for understanding the Zone System! <http://www.kenrockwell.com/tech/zone.htm>

